MHI Copy 3



WAR DEPARTMENT

BASIC FIELD MANUAL

MILITARY INTELLIGENCE

IDENTIFICATION OF BRITISH ARMORED VEHICLES

May 27, 1941

REGRADED UNCLASSIFIED BY
AUTHORITY OF DOD DIR. 5200. 1 R
BY MUSS ON OZIO3


FILE COPY CONOT REMOVE

RESTRICTED CLASSIFICATION
REMOVED TERM

UNCLASSIFIED



FM 30-41



BASIC FIELD MANUAL

MILITARY INTELLIGENCE IDENTIFICATION OF BRITISH ARMORED VEHICLES

Prepared under direction of the Chief of Staff



UNITED STATES
GOVERNMENT PRINTING OFFICE
WASHINGTON: 1941

WAR DEPARTMENT, WASHINGTON, May 27, 1941.

FM 30-41, Military Intelligence, Identification of British Armored Vehicles, is published for the information and guidance of all concerned.

[A. G. 062.11 (4-2-41).]

By ORDER OF THE SECRETARY OF WAR:

G. C. MARSHALL, Chief of Staff.

OFFICIAL:

E. S. ADAMS,

Major General,

The Adjutant General.


Distribution:

X

(For explanation of symbols, see FM 21-6.)

TABLE OF CONTENTS

SECTION I	. General.	Paragraph	Page
	Purpose	1	1
	Scope	2	1
	Method of identification and classification of armored vehicles_	3	1
I	I. Armored vehicles of the British Army_		. 3



BASIC FIELD MANUAL

MILITARY INTELLIGENCE

IDENTIFICATION OF BRITISH ARMORED VEHICLES


SECTION I

GENERAL.

- □ 1. Purpose.—The purpose of this manual is to serve as a guide in the identification of armored vehicles of the British Army. The material is the best available but may be incomplete and, in some respects, inaccurate.
- 2. Scope.—This manual, containing illustrations with explanatory data relative to British armored vehicles, is published for limited distribution. When illustrations are not given, blank spaces have been left so that they may be added when provided. The manual will be used for instruction of officers and men in the appearance and general characteristics of armored vehicles and will be safeguarded as prescribed in AR 380-5.
- 3. METHOD OF IDENTIFICATION AND CLASSIFICATION OF ARMORED VEHICLES.—For method of identification and classification of armored vehicles see FM 30-40.

SECTION II ARMORED VEHICLES OF THE BRITISH ARMY

BRITISH ARMY

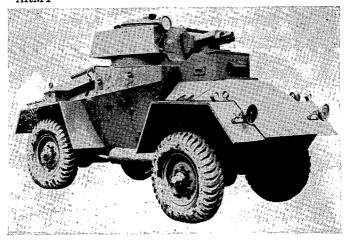

SCOUT CAR GUY ARMORED CAR

- 1. Crew: Three.
- 2. Armament: One 15-mm Besa machine gun; one 7.92-mm Besa machine gun.
- 3. Ammunition: 150 rounds for 2,250 rounds for gun; machine gun.
- 4. Armor, thickness: 0.55 inch. Upper structure: Front:
 - Sides:
- 5. Turret:
- 6. Vision: Triplex glass block slits, Grundlach periscope, telescopic sight.
- 7. Ventilation:
- 8. Communications: 2 way radio.
- 9. Dimensions:

Length: 14 feet, 6 inches. Width: 7 feet 1 inch. Height: 8 feet 1 inch.

- 10. Weight: 5.6 tons.
- 11. Motor: Meadows.

Type: 4-cylinder. Cooling system: Horsepower: 53 horsepower at 2.400 revolutions per minute.

Horsepower per ton: 9.5.

- 12. Drive:
- 13. Speed: Cross-country: 16 miles per hour.

Road: 24 miles per hour. Maximum: 40 miles per hour.

- 14. Cruising radius, at _____ speed 200 miles.
- 15. Operating distance without refill:
- 16. Gear speeds and ratios:
- 17. Turning radius: 18. Suspension, type: Automobile, four wheels.
- 19. Performance:

Ground clearance: 12 inches.

Climbs 25° slopes.

Negotiates vertical obstacle high. Crosses trenches _____

wide.

Fords streams 1 foot 7 inches deep.

20. Remarks: The Guy is intended to replace Morris Armored Reconnaissance

BRITISH ARMY SCOUT CAR GUY ARMORED CAR

Top.






Rear.



BRITISH ARMY

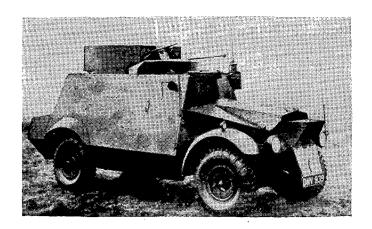

SCOUT CAR MORRIS ARMORED RECONNAISSANCE CAR

- 1. Crew: Four.
- .303-cal. 2. Armament: One Bren machine gun; one .55 Boys antitank rifle.
- 3. Ammunition:
- 4. Armor, thickness: 3/8 inch.

Upper structure:

Front: Sides:

- 5. Turret:
- 6. Vision:7. Ventilation:
- 8. Communications: Radio.
- 9. Dimensions: Length:

Width: Height:

- 10. Weight: 4.48 tons.11. Motor: Morris.

Type: 6 cylinders. Cooling system: Horsepower: 99.5 horse-

power at 3,000 revolutions per minute.

Horsepower per ton:

- 12. Drive: 13. Speed:
 - Cross-country: 24 miles per hour.

Road: 45 miles per hour. Maximum: 65 miles per hour.

- 14. Cruising radius, at _____speed 240 miles.
- 15. Operating distance without refill: Čapacity, 30 gallons.
- Gear speeds and ratios:
 Turning radius:
- Suspension, type: Automo-bile, four wheels.
- 19. Performance:

Ground clearance: Climbs _____ slopes.

Negotiates vertical obstacle ____ high. Crosses trenches ____

wide. Fords streams


deep.

20. Remarks:


BRITISH ARMY

SCOUT CAR MORRIS ARMORED RECONNAISSANCE CAR

Top.



Rear.

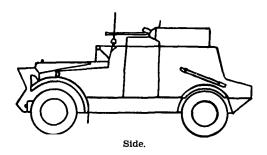

BRITISH ARMY



HUMBER ARMORED CAR

	1.	Crew:	Three
--	----	-------	-------

- 2. Armament: One machine gun, 7.92-cal.; one machine gun, 15-mm.
- Ammunition: 2,250 rounds for light machine gun; 150 rounds for heavy machine gun.
- 4. Armour, thickness: 0.55 inch.
 Upper structure:
 Front:
 - Sides:
- 5. Turret:
- 6. Vision:
- 7. Ventilation:
- 8. Communications: Radio.
- 9. Dimensions:
 - Length:
 - Width:
 - Height:
- 10. Weight:
- 11. Motor:
 - Type: Karrier—6-cylin
 - der.
 - Cooling system:

Horsepower:		
Horsepower per	ton	:

- 12. Drive:
- 13. Speed:

Cross-country:

Road:

Maximum:

- 14. Cruising radius, at ____. speed ____ miles.
- 15. Operating distance without refill:
- 16. Gear speeds and ratios:
- 17. Turning radius:
- 18. Suspension, type:
- 19. Performance:

Ground clearance: Climbs _____ slopes.

Negotiates vertical obstacle ____ high.

Crosses trenches _____ wide.

Fords streams ___ deep.


20. Remarks:

BRITISH ARMY HUMBER ARMORED CAR


Тор.

Front.

Rear.



BRITISH ARMY

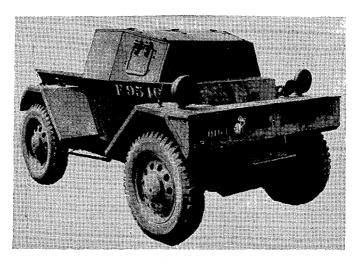

SCOUT CAR BSA

- Crew: Two.
- 2. Armament: One .303-cal. Bren machine gun.
- 3. Ammunition: 2.500 rounds (estimate).
- 4. Armor, thickness:
 - Upper structure: 1 inch. Front: 3/16 inch. Sides: 1/4 inch.
- 5. Turret:
- 6. Vision: Slits with triplex blocks.
- 7. Ventilation:
- 8. Communications: Voice, no radio.
- 9. Dimensions:
 - Length: 10 feet 5 inches. Width: 6 feet 7 inches. Height: 5 feet.
- 10. Weight: 21/2 tons (approximate).
- 11. Motor: Daimler,
 - Type: 6-cylinder. Cooling system: Water. Horsepower: 18 horsepower. Horsepower per ton:

- 12. Drive:
- 13. Speed:
 - Cross-country: 20 miles per hour.

Road: 35 miles per hour. Maximum: 55 miles per hour.

- 14. Cruising radius, at _____speed 200 miles.
- 15. Operating distance without refill:
- 16. Gear speeds and ratios:17. Turning radius:
- 18. Suspension, type: Automobile, four wheels independently sprung.
- 19. Performance:
 - Ground clearance: 10 inches.


Climbs _____o slopes. Negotiates vertical ob-

stacle ____ high. Crosses trenches _____ wide.

Fords streams _____ deep.


20. Remarks:

BRITISH ARMY SCOUT CAR BSA










The above silhouettes were prepared from a sketch and are not extremely accurate.

BRITISH

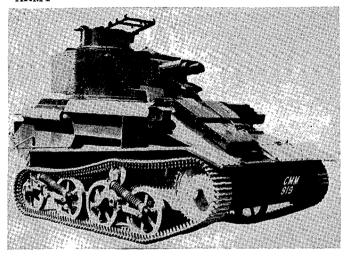

LIGHT TANK MARK VI

1. Crew: Three.

2. Armament: One .50-cal. machine gun; one .303-cal. machine gun.

3. Ammunition: 2,500 rounds .50-cal.; 2,500 rounds .303-cal.

4. Armor, thickness: 0.55 inch.
Upper structure:
Front: 0.55 inch.
Sides: 0.51 inch.

5. Turret: One.

6. Vision: S. SB. T.

Ventilation: No special system.

8. Communications:

Internal: Voice tube. External: Wireless, flag.

9. Dimensions:

Length: 13 feet.

Width: 6 feet 8 inches. Height: 6 feet 9 inches.

10. Weight: 6.27 tons.

Motor: Meadows.

Type: 6-cylinder. Cooling system: Water. Horsepower: 88 horsepower at 3,000 revolutions per minute.

Horsepower per ton: 14.

12. Drive:

13. Speed:

Cross-country: 23 miles per hour.

Road:

Maximum: 30 miles per hour.

14. Cruising radius, at _____ speed, 150 miles.

15. Operating distance without

refill: Capacity, 42 gallons.

16. Gear speeds and ratios: Four forward, one reverse.

Turning radius: 16 feet (estimated).

 Suspension, type: Two bogies, eight bogie wheels, two track support wheels.

19. Performance:

Ground clearance: Climbs 25° slopes.

Negotiates vertical obstacle 2 feet high.


Crosses trenches 4 feet wide.

Fords streams 2 feet 6 inches deep.


 Remarks: Rough riding and unsteady as a gun platform. Similar in appearance to Light Tank Mark VI-C.

BRITISH ARMY LIGHT TANK MARK VI

Top.



Front.




Rear.



Side.

BRITISH ARMY

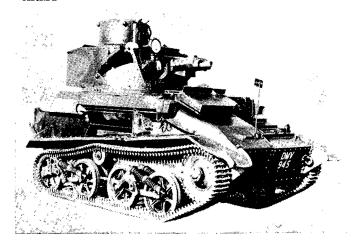

LIGHT TANK MARK VI-B.

1. Crew: Three.

 Armament: One .50-cal. machine gun; one .303-cal. machine gun.

3. Ammunition: 2,500 rounds .50-cal.; 2,500 rounds .303-

4. Armor, thickness: 0.55 inch.
Upper structure:
Front: 0.55 inch.
Sides: 0.51 inch.

5. Turret: One.

6. Vision: S. SB. T.

Ventilation: No special system.

8. Communications:

Internal: Voice tube. External: Wireless, flag.

9. Dimensions:

Length: 13 feet.
Width: 6 feet 8 inches.
Height: 6 feet 9 inches.

10. Weight: 6.27 tons.

11. Motor: Meadows.

Type: 6-cylinder. Cooling system: Water. Horsepower: 88 horsepower at 3,000 revolutions per minute. Horsepower per ton: 14.

12. Drive: Clutch brake?

13. Speed:

Cross-country: 23 miles per hour.

Road:

Maximum: 30 miles per hour.

14. Cruising radius at _____ speed 150 miles.

 Operating distance without refill: Capacity, 42 gallons.
 Gear speeds and ratios: Four

forward, one reverse.

17. Turning radius: 16 feet (es-

timated).

 Suspension, type: Two bogies, eight bogie wheels, two track support wheels.

19. Performance: Ground clearance:

Climbs 25° slopes. Negotiates vertical obstacle 2 feet high.

Crosses trenches 4 feet


wide.
Fords streams 2 feet 6 inches deep.

 Remarks: Rough riding and unsteady as a gun platform. When Besa gun substituted for Vickers machine gun, tank is called Mark VI-C.

BRITISH ARMY

LIGHT TANK MARK VI-B


Top.

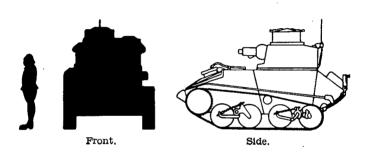



Side.

BRITISH ARMY

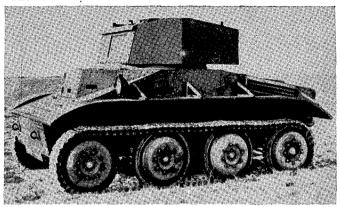

LIGHT TANK MARK VII

 Crew: Three. 2. Armament: One 40-mm gun: 7.92-mm maone

chine gun: two smoke dischargers. Ammunition: 50 rounds 40-

mm:

- mm; 2,025 rounds 7.92-Я rounds 4-inch smoke. 4. Armor, thickness: 0.55 inch.
- Upper structure: Front: 0.63 inch. Sides:
- 5. Turret:
- Ammunition: 50 rounds 40episcope, triplex blocks.
- 7. Ventilation: Two radiators in rear draw gases from fighting compartment.
- 8. Communications: Radio, lamp, flag. Internal: telephone using radio set.
- Dimensions:

Length: 13 feet 5 inches (14 feet 1 inch with gun to front). Width: 7 feet 7 inches.

Height: 6 feet 111/2 inches with periscope; 6 feet 71/2 inches with-

out periscope.

10. Weight: 7.84 tons.

11. Motor: Meadows.

Type: 12-cylinder. Cooling system: Water. Horsepower: 165 horse-

power at 2.800 revolutions per minute. Horsepower per 21.04.

- Steering, brake or controlled differential: Curving track, also auxiliary brake steering.
- 13. Speed:

Cross-country:

Road:

- Maximum: 40 miles per hour.
- 14. Cruising radius, at _____speed 200 miles.
- 15. Operating distance without refill: Capacity, 50.6 gallons.
- 16. Gear speeds and ratios: Five forward, one reverse.
- 17. Turning radius: 87 feet.
- 18. Suspension, type: Christie type, eight wheels 28.5 inches in diameter.
- 19. Performance:

Ground clearance: 14 inches.

Climbs 35° slopes.

Negotiates vertical stacle 2 feet high.

Crosses trenches 5 feet wide.


Fords streams feet

deep.

20. Remarks: Latest and final type light tank.


BRITISH ARMY

LIGHT TANK MARK VII

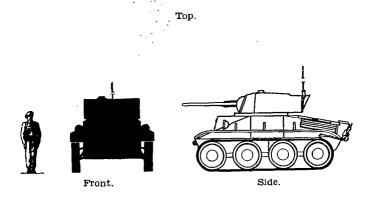

Side.


BRITISH ARMY

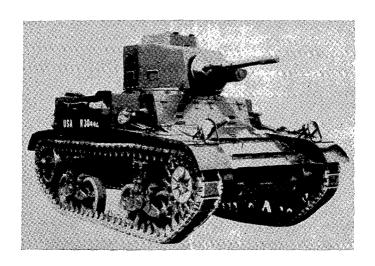

LIGHT TANK

(Similar to United States Army Light Tank M2A4)

BRITISH ARMY LIGHT TANK
(Similar to
United States Army
Light Tank M2A4)



Top.



Front.




Rear.



Side.


BRITISH ARMY

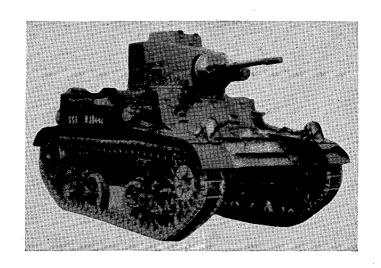


LIGHT TANK

(Similar to United States Army Light Tank M3)

BRITISH ARMY LIGHT TANK
(Similar to
United States Army
Light Tank M3)









Rear.



Side.

BRITISH ARMY



MEDIUM TANK CRUISER TANK, MARK V A13

- 1. Crew: Four.
- 2. Armament: One 40-mm gun; two machine guns; one submachine gun.
 3. Ammunition: 87 rounds for
- gun; 4,275 rounds for machine gun; thirty 2-inch smoke bombs.
- 4. Armor, thickness:

Upper structure: 1.57 inches.

Front: 1.57 inches. Sides: 1.18 inches.

- 5. Turret:
- 6. Vision: S. SB. T.
- 7. Ventilation:
- 8. Communications: 9. Dimensions:

Length: 19 feet 2 inches. Width: 8 feet. Height: 8 feet 3 inches.

10. Weight: 17.92 tons. 11. Motor: Meadows.

Type: 12-cylinder. Cooling system: Horsepower: 344 horse-power at 1,550 revolutions per minute. Horsepower per ton: 23.6.

- 12. Drive:
- 13. Speed:

Cross-country: 20 miles per hour.

Road:

Maximum: 30 miles per hour.

- 14. Cruising radius, at _____ speed 140 miles.
- Operating distance without refill: Capacity, 88 gallons.
- 16. Gear speeds and ratios: Four forward, one reverse.
- 17. Turning radius:
- 18. Suspension, type: wheels. Christie type.
- 19. Performance:

Ground clearance:

Climbs 35° slopes. Negotiates verticle obstacle 3 feet high.

Crosses trenches 7 feet 6 inches wide.

Fords streams ____

deep. 20. Remarks: two smoke dischargers.

BRITISH ARMY MEDIUM TANK CRUISER TANK MARK V A13


Top.

Front.

Rear.

Side.


BRITISH ARMY

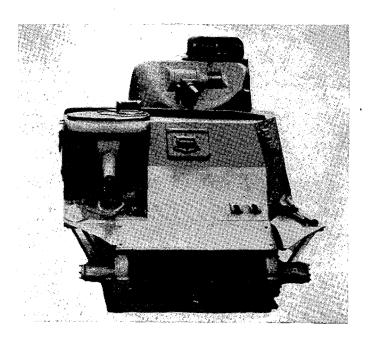


MEDIUM TANK


(Similar to United States Army Medium Tank M3)

BRITISH ARMY MEDIUM TANK
(Similar to
United States Army
Medium Tank M3)










BRITISH ARMY

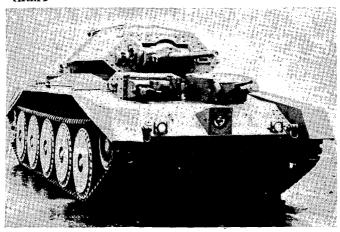

MEDIUM TANK CRUISER TANK, MARK VI A15

- 1. Crew: Five.
- 2. Armament: One 1-pounder or 2-pounder or 3-inch howitzer and one 7.92-mm Besa in turret: two 7.92mm Besa; one 2-inch bomb thrower.
- 3. Ammunition: 5,175 rounds thirty 7.92-mm; 2-inch smoke bombs; 151 rounds 2-pounders or 54 rounds 3-inch howitzer.
- 4. Armor, thickness: 1.57-inch. Upper structure: Front:

Sides:

- 5. Turret:6. Vision:
- 7. Ventilation: Two ejector fans.
- 8. Communications: No. 9 ra-

dio. Internal: Tannoy loud

speaker.

9. Dimensions:

Length: 19 feet 3 inches. Width: 8 feet 8 inches. Height: 7 feet 2 inches.

10. Weight: 19.6 tons. 11. Motor: Liberty.

Type: 12-cylinder V. Cooling system: Water. Horsepower: 340 horsepower at 1,550 revolu-

tions per minute. Horsepower per 17.35.

- 12. Drive: Wilson Epicyclicgear with skid brake.
- Speed:

Cross-country:

Road:

Maximum: 30 miles per hour.

- 14. Cruising radius, at _____ speed 110 miles.
- 15. Operating distance without refill: Capacity, 132 gallons.
- 16. Gear speeds and ratios: Four forward, one reverse.
- 17. Turning radius:
- 18. Suspension, type: Christie, 10 wheels each-bogie on independent axle.
- 19. Performance:

Ground clearance: 1 foot

3 inches.

Climbs 30° slopes. Negotiates vertical ob-

stacle 1 foot 6 inches high.

Crosses trenches 7 feet 6 inches wide.

Fords streams 3 feet deep.

20. Remarks:

BRITISH ARMY MEDIUM TANK CRUISER TANK MARK VI A15

Top.


Front.

Rear.



Side.

BRITISH ARMY

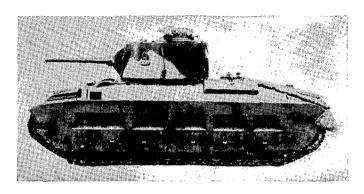

MEDIUM TANK INFANTRY TANK MARK II

- 1. Crew: Four.
- 2. Armament: One 40-mm gun; one .303-cal. machine gun.
- 3. Ammunition: 67 rounds 40mm: 3.250 rounds .303-cal.
- 4. Armor, thickness: 2.75 inches.

Upper structure: Front:

Sides: 1 inch.

- Turret: Cast armor.
- 6. Vision: Grundlach periscope; slits with triplex blocks.
- 7. Ventilation:
- 8. Communications:

Internal: Voice tube. External: Radio, lamp, flag.

9. Dimensions:

Length: 18 feet 9 inches. Width: 8 feet 3 inches. Height: 8 feet 5 inches.

10. Weight: 28 tons. 11. Motor: Two AEC.

each.

Type: 6-cylinder Diesel. Cooling system:

Horsepower: 95 horse-power at 2,000 revolutions per minute

Horsepower per ton: 6.78

- 12. Drive:
- 13. Speed:

Cross-country: · hao.g

Maximum: 15 to 18 miles per hour.

- 14. Cruising radius, at
- speed 50 to 60 miles. 15. Operating distance without
- refill: Capacity, 56 gallons. 16. Gear speeds and ratios: Five forward, one reverse.
- 17. Turning radius:
- 18. Suspension, type: Two bogies with four wheels, one independent pair of wheels, jockey wheel forward.
- 19. Performance:

Ground clearance:

Climbs 30° slopes.

Negotiates vertical obstacle 2 feet 6 inches high.

Crosses trenches 8 feet

wide. streams Fords

deep.

20. Remarks: Formerly Mark I A 12.

BRITISH ARMY MEDIUM TANK INFANTRY TANK MARK II

Top.

Front.

Rear.

Side.

BRITISH ARMY



MEDIUM TANK INFANTRY TANK MARK III VALENTINE

- Crew: Three.
- 2. Armament: One 40-mm, one 7.92-mm, one 2-inch mor-
- 3. Ammunition: 52 rounds 40mm; 3,150 rounds 7.92mm: 18 rounds 2-inch mortar.
- 4. Armor, thickness:

Upper structure: Front: 2.36 inches.

Sides:

Turret: 23/4 inches.

- 5. Turret: Cast steel cupola. 6. Vision: Four Grundlach periscopes, telescopic sight, triplex blocks on slits.
- 7. Ventilation: Slits wih baffle plates front and rear of turret.
- 8. Communications:

Internal: Telephone with loud speaker. External: Radio, lamp,

flag. 9. Dimensions:

17 feet 11 Length: inches.

Width: 8 feet 9 inches. Height: 7 feet 6 inches.

10. Weight: 17.92 tons.

11. Motor: AEC.

Type: 6-cylinder Diesel. Cooling system:

Horsepower: 150 horse-power at 2,200 revolu-

tions per minute.

Horsepower per ton: 8.37. 12. Drive:

13. Speed:

Cross-country:

Road:

Maximum: 15 miles per hour.

14. Cruising radius, at _____ speed 93 miles.

- 15. Operating distance without refill: Capacity,74.7 gallons.
- 16. Gear speeds and ratios: Five forward, one reverse.
- 17. Turning radius:
- 18. Suspension, type:
- 19. Performance:

Ground clearance:

Climbs 32° slopes. Negotiates vertical obstacle 3 feet high.

Crosses trenches 8 feet wide.


Fords streams deep.

20. Remarks:

BRITISH ARMY MEDIUM TANK INFANTRY TANK MARK III VALENTINE

Top.

Front. Rear.



BRITISH ARMY

MEDIUM TANK INFANTRY TANK M-IV (A-22)

1. Crew: Five.

2. Armament:

Turret: One 2-pounder; 1 machine gun; 1 submachine gun; 1 smoke mortar; and 1 Bren machine gun.

Hull front: One 3-inch howitzer and one submachine gun.

3. Ammunition: 150 rounds for 2-pounder; 600 rounds for Bren machine gun; 400 rounds for submachine gun.

4. Armor, thickness:

Upper structure: inch. Front: 31/2 inches.

Sides: 3 inches. Turret: 31/2 inches.

5. Turret: One telescope, three periscopes, three lookouts.

6. Vision:
7. Ventilation:
8. Communications:
9. Dimensions:

Length: 23 feet 6 inches. Width: 10 feet 8 inches. Height: 8 feet 1 inch.

10. Weight: 35 tons.

11. Motor:

Type: Vauxhall 12cylinder flat engine. Cooling system: Horsepower: 360. Horsepower per ton:

12. Drive: 13. Speed:

Cross-country:

Road:

Maximum: 161/4 miles per hour at 2,400 revolutions per minute.

14. Cruising radius, at _____ speed 100 miles.

15. Operating distance without refill:

16. Gear speeds and ratios:17. Turning radius:

18. Suspension, type: New type of 22 independent units.

19. Performance:


Ground clearance: 1 foot 8 inches. Climbs 30° slopes.

Negotiates vertical obstacle ____ high. Crosses trenches _____


wide. Fords streams 3 feet

deep. 20. Remarks: About 60 per week being manufactured.

BRITISH ARMY MEDIUM TANK INFANTRY TANK M-IV (A-22)



Front. Rear.



BRITISH ARMY

HEAVY TANK ASSAULT OR FORTRESS TANK

BRITISH

HEAVY TANK ASSAULT OR FORTRESS TANK


Top.

Front.

Rear.

Side.

BRITISH ARMY

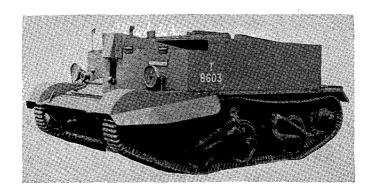

PERSONNEL CARRIER BREN MACHINE GUN CARRIER NO. 2 MARK I

- 1. Crew: Three.
- 2. Armament: One Bren machine gun or .55 Boys antitank rifle.
- 3. Ammunition:
- 4. Armor, thickness:

Upper structure: 516 inch (approximate). Front:

Sides:

5. Turret:

- 6. Vision: Slits and telescope.
- 7. Ventilation:
- 8. Communications: None.
- 9. Dimensions:

Length: 11 feet 10

inches. Width: 6 feet 10 inches.

Height: 4 feet 4 inches.

10. Weight: 3½ tons.11. Motor: Ford.

Type: V-8.

Cooling system:

Horsepower: 30.

Horsepower per ton:

12. Drive: Girling type brakes. 13. Speed:

Cross-country: 20 miles per hour.

Road: 30 miles per hour. Maximum:

14. Cruising radius, at

speed ____ miles.

- 15. Operating distance without refill: Capacity, 20 gallons.
- 16. Gear speeds and ratios:
- 17. Turning radius:
- 18. Suspension, type: 6-wheel.

19. Performance:

Ground clearance: inches (estimated).

Climbs 25° slopes. Negotiates vertical obstacle 2 feet high.

Crosses trenches 5 feet wide.

Fords streams 1 foot 6


inches deep.

20. Remarks:

BRITISH ARMY PERSONNEL CARRIER BREN MACHINE GUN CARRIER NO. 2 MARK I




Side (old model).







Rear.



 \bigcirc

REGIRATED

WAR DEPARTMENT THE ADJUTANT GENERAL'S OFFICE WASHINGTON

In reply

refer to AG 062.11 FM 30-41 (2-26-42)PC-C

March 7, 1942.

SUBJECT: Change in classification of FM 30-41.

TO:

Chief Signal efficer.

The classification of FN 30-41 (Identification of British Armored Vehicles), May 27, 1941, is changed from "Confidential" to "Restricted".

By order of the Secretary of Wax:

Adjutant General

OFFICE OF THE